

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Michael A. Helgeson

Serial No.: Unknown

Filing Date: May 13, 1999

For: STATE VALIDATION USING BI-DIRECTIONAL WIRELESS LINK

Docket No.: 1004.1123101

TRANSMITTAL SHEET

Assistant Commissioner for Patents

Washington, D.C. 20231

Sir:

CERTIFICATE UNDER 37 C.F.R. 1.10: The undersigned hereby certifies that this paper or papers, as described herein, are being deposited in the United States Postal Service, "Express Mail Post Office to Addressee" having an Express Mail mailing label number of EL085667194US, in an envelope address to: Assistant Commissioner for Patents, Washington, D.C., 20231 on this 13th day of May, 1999.

By 

We are transmitting herewith the attached Patent Application including the following:

- ☒ THIRTY-THREE (33) sheets of specification.
- ☒ THIRTY-FOUR (34) claims.
- ☒ ONE (1) sheet(s) of Abstract.
- ☒ FIVE (5) sheet(s) of informal drawings.
- ☒ Unexecuted Declaration and Power of Attorney.
- ☐ A verified statement(s) to establish small entity status under 37 C.F.R. 1.9 and/or 1.27 is enclosed.
- ☐ An Assignment of the invention to _____ is being filed contemporaneous with this patent application.


[] A certified copy of a _____ application, serial no. _____, filed _____, 19____, the right of priority of which is claimed under 35 U.S.C. 119.

CLAIMS AS FILED						
	(1)	(2)	SMALL ENTITY		OTHER	
FOR:	# FILED	# EXTRA	Rate	Fee	Rate	Fee
BASIC FEE				\$380		\$760
TOTAL CLAIMS	34 -20 =	14	x9=	\$	x18=	\$252
INDEPENDENT CLAIMS	6 -3 =	3	x39=	\$	x78=	\$234
() MULTIPLE DEPENDENT CLAIM PRESENTED			+130=	\$	+260=	\$1246
TOTAL			\$		\$1,246.00	

*If the difference in Column (1) is less than zero, enter "0" in Column 2.

[] Other _____

[] A check in the amount of \$_____ is enclosed.

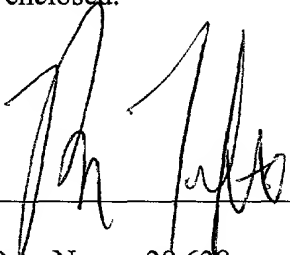By: 
Reg. No. 38,638

Brian N. Tufte
CROMPTON, SEAGER & TUFTE LLC
331 Second Avenue South, Suite 895
Minneapolis, Minnesota 55401-2246
Telephone: (612) 677-9050
Facsimile: (612) 359-9349

STATE VALIDATION USING BI-DIRECTIONAL WIRELESS LINK

CROSS REFERENCE TO CO-PENDING APPLICATIONS

The present application is related to U.S. Patent Application Serial No. _____ filed _____, entitled "Output Buffer With Independently Controllable Current Mirror Legs"; U.S. Patent Application Serial No. _____, filed _____, entitled "Differential Filter with Gyrator"; U.S. Patent Application Serial No. _____, filed _____, entitled "Compensation Mechanism For Compensating Bias Levels Of An Operation Circuit In Response To Supply Voltage Changes"; U.S. Patent Application Serial No. _____, filed _____, entitled "Filter With Controlled Offsets For Active Filter Selectivity and DC Offset Control"; U.S. Patent Application Serial No. _____, filed _____, entitled "Wireless System With Variable Learned-In Transmit Power"; and U.S. Patent Application Serial No. _____, filed _____, entitled "Wireless Control Network With Scheduled Time Slots", all of which are assigned to the assignee of the present invention and incorporated herein by reference.

FIELD OF THE INVENTION

The present invention relates generally to building monitoring and control for commercial and residential use. More specifically, the present invention relates to building monitoring and control systems such as security, HVAC or other monitoring systems that utilize wireless, bi-directional radio frequency communication between master units and remote units. In particular, the present invention relates to remote units having low transmission duty cycles, low power consumption, and alarm validation capabilities.

BACKGROUND OF THE INVENTION

Building monitoring and control systems including security system, HVAC and other monitoring and control systems are in increasing use in both commercial buildings and residential dwellings. For security systems, the increasing use is due in part to a long-term perception of increasing crime rates along with increasing awareness of the availability of building monitoring and security systems. For HVAC systems, the increasing use is due in part to the desire to reduce heating and cooling costs, and to save energy.

A building monitoring and/or control system typically includes a variety of remote units coupled to detection devices and at least one master unit which typically resides in a central location in the building and can include annunciation functions and reporting functions to another location such as a central reporting service or police department. Remote units have, in the past, been hard wired to the master unit. For example, in a security system, reed switches or Hall effect switches are often disposed near magnets located near doors and door jambs, with a door opening making or disrupting continuity, with the resulting signal being received by the master unit.

In hardwired systems the remote units and the detection devices may be nearly one in the same. For example, the detection device may be a foil trace on a glass pane and the remote unit may be wire terminals with optional signal conditioning equipment leading to a wire pair connected to the master unit. Hard wired units can be installed most easily in new construction, where running wire pairs is easier than in existing buildings. Installing hard-wired systems can be very expensive in existing buildings due in part to the labor costs of snaking wires through existing walls and ceilings. In

particular, on a point-by-point basis, retrofitting residential dwellings can be expensive because houses are often not designed to be continually changed, as are many office buildings. For example, most houses do not have dropped ceilings and utility closets at regular intervals. Houses can have higher aesthetic expectations than commercial office
5 buildings, requiring greater care in installing and concealing wiring.

Wireless security systems have become increasingly common. Existing systems use radio frequency transmission, often in the 400 MHz region. Wireless systems can greatly reduce the need for wiring between remote and master unit or units. In particular, wireless systems can communicate between the remote units and the master units without
10 wiring. Remote units still require power to operate, and can require wiring to supply that power, which can add a requirement for power wiring where the power had been provided in hard wired systems over the wiring used to communicate between remote units and the master unit. The power requirement can partially negate the wireless advantage of radio frequency units, as some wiring is still required. The power supply
15 wiring requirement is often eliminated with the use of batteries. Battery life is largely a function of power consumption of the remote units. The power consumption is dependent upon both the electronics and upon the duty cycle of the unit.

Current wireless systems typically utilize remote units which can only transmit and master units which only receive. Remote units often transmit sensor data for
20 needlessly long periods, and at higher power than is required, as there is no bi-directional capability, and therefore no way for the master unit to acknowledge receipt of the first remote unit message, or a low power message. Sometimes, the remote units transmit a health status message at regular periodic intervals. The health status message gives the

health of the remote unit, sometimes includes sensor data, and informs the master unit that the remote unit is still functioning. The periodic transmissions can be scheduled at the remote units by DIP switches or local programming of the remote units, but typically cannot be adjusted by the master unit as the communication between master and remote is uni-directional and the master has no way to adjust the timing of transmissions of the remote units. Since there is no coordination between the transmission times of the remote units, collisions can occur between remote unit transmissions, which may reduce the overall reliability of the system. To increase the probability that a particular remote unit transmission is received by the master, the remote unit may make the same transmission many times. However, this can significantly increase the power consumed by the remote units.

Another limitation is that false alarms can be generated. False alarms undermine the credibility of real alarms and can cost money to respond to. For security systems, private security firms often charge to investigate alarms reported to them. Many municipalities charge large fees for false alarms that are reported to police departments. Too many false alarms can result in all or part of a security system to be ignored or turned off entirely. For HVAC systems, false alarms can cause, for example, heat to be applied even if it is not desired. As can be seen, this can decrease the efficiency of the HVAC system.

What would be desirable, therefore, is a bi-directional wireless security, HVAC or other building monitoring system that allows communication between the master and remote units for increased reliability. What would also be desirable is a system that has one or more low power modes for conserving valuable power resources.

SUMMARY OF THE INVENTION

666750"2307E60
The present invention includes a building monitoring and/or control system that includes bi-directional radio frequency links between master and remote units wherein the remote units preferably operate in a low power, non-transceiving state a majority of the time. The system can include at least one master unit and a plurality of remote units, the remote units being typically coupled to sensors for measuring and/or controlling security or building environment variables. The remote units in most systems can operate in a low power consumption state in which the unit can neither transmit nor receive, in a receive state in which the unit consumes more power and can receive transmissions from the master unit, and in a transmit state in which the unit consumes more power and can transmit messages to the master unit. Some embodiments include armed states in which the remote unit can sense and transmit data, and disarmed states in which the remote unit cannot, in combination, sense and transmit data. Disarmed states can provide a low power consumption state in which power is consumed neither for sensing variables nor for transmitting data.

In some embodiments, remote units are in a receive state only for a period after transmitting. In some embodiments, the remote units are in a receive state only after transmitting and are in a receive state periodically, often waiting for polling by a master unit. Some remote units transmit data at periodic intervals and transmit data after the occurrence of an event. Events can include timeout events, sensor change events, and polling events. In preferred embodiments, remote units await acknowledgment from a master unit after a transmission. After receipt of an acknowledgment, the remote units preferably do not further transmit the same message.

Remote unit sensors can be used to detect state changes in security devices such as door and window switches. Sensors can also be used to measure analog or continuously variable properties of a building environment such as temperature, humidity, airflow, and hot water flow. In some embodiments, upon expiration of a timer, building data such as temperature is reported as an event in the same manner as a door opening.

In one process suitable for executing in a remote unit, the remote unit: determines a time for communication with a master; waits in a low power non-receive and non-transmit state for either a timeout to arrive or an event to occur; changes to a transmitting state upon detecting the event and transmits data to the master unit; changes to a transmitting state upon occurrence of the timeout and transmits data to the master unit; waits for acknowledgement from the master unit after transmitting data; and resumes the low power state. If acknowledgement is not received, in preferred embodiments, retransmission is performed, perhaps at a higher power level. In one process, timing information for the next transmission is received by the remote unit along with the acknowledgment. The acknowledgement can be used to re-synchronize the timer of the remote unit with the timer of the master unit. In one process, frequency information relating to the next transmission is received by the remote unit along with the acknowledgment.

In one system, remote units have an armed state in which the sensors can sense and the unit can transmit and a disarmed state in which, in combination, the sensors cannot both sense and the remote unit transmit. In the disarmed state, the sensor cannot sense and/or the transmitter cannot transmit. In the previously described disarmed state,

in some embodiments, the sensor functionality is disabled to save energy. In some embodiments, the transmitting functionality is disabled to prevent transmissions even when otherwise transmittable events occur. For example, in a disarmed state, a door reed switch may still sense continuity, but the door opening will not be transmitted, to save on energy and extend battery life when the door opening is not a concern. In some embodiments, both sensor and transmitting functionality are disabled to save on energy and extend battery life. It is contemplated that the sensor state may be reconfigured on the fly depending on the current mode of the system.

In some systems, the master unit, upon receiving an event from a remote unit, can request a re-read of the sensor to validate the event before taking further action. A decision whether to request a re-read can be based on the sensor type and the current mode of the system. In one embodiment, the sensor type is transmitted along with the data. The sensor type is determined in another embodiment by the master looking up the remote unit ID and determining the sensor type or types associated with it. The sensor type is determined in another embodiment by the master looking up the sensor type in a previously built table. The table can be built from data obtained at initialization of either the remote units or the master unit. The information associated with a remote unit sensor can include whether to re-read, how long to wait before a re-read, and how many times to re-read. The validation functionality can greatly reduce false alarms.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a wireless control system having a master unit and two remote units;

Figure 2 is a block diagram of a wireless remote unit having a transceiver coupled to a controller;

Figure 3 is a block diagram of a master unit having a transceiver coupled to a controller;

5 Figure 4 is a state transition diagram of a process which can execute in a remote unit;

Figure 5 is a state-transition diagram of a process which can execute in a remote unit for arming and disarming a remote device; and

Figure 6 is a state-transition diagram of a process which can execute in a remote
10 unit for handling confirmation requests by a master unit.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 illustrates a wireless control system 20 including a master unit 22 and two wireless remote units 24 and 25. Master unit 22 includes an antenna 26, a power supply line 28, annunciator panel output line 30, alarm device output line 32, and
15 telephone line 34. A building monitoring and/or control system according to the present invention typically has at least one master unit which is commonly powered with AC line power but can be battery powered, or have battery back-up power. Remote unit 24 includes an antenna 23 and is coupled to two discrete sensor inputs 36 and 38. Sensor input 36 is a normally open sensor and sensor input 38 is a normally closed sensor.
20 Sensors 36 and 38 can be reed switches or Hall effect devices coupled to magnets used to sense door and window opening and closing. Sensor 38 can be a foil continuity sensor used to detect glass breakage. Remote unit 25 includes antenna 23 and two analog sensors 40 and 42. Sensor 40 is a variable resistance device and security sensor 42 is a

variable voltage device. Analog sensors can measure variables such as vibration, noise, temperature, movement, and pressure. Sensors typically sense or measure variables and output data. The data can be binary or discrete, meaning on/off. Data can also be continuous or analog, meaning having a range of values. Analog data can be converted
5 to digital form by using an A/D converter.

Examples of sensors include intrusion sensors such as door switches, window switches, glass breakage detectors, and motion detectors. Safety sensors such as smoke detectors, carbon monoxide detectors, and carbon dioxide detectors are also examples of sensors suitable for use with the current invention. Other sensors include temperature
10 sensors, water detectors, humidity sensors, light sensors, damper position sensors, valve position sensors, electrical contacts, BTU totalizer sensors, and water, air and steam pressure sensors. In addition to sensors, output devices can also be included with the present invention. Examples of output devices include valve actuators, damper actuators, blind positioners, heating controls, and sprinkler head controls. In one embodiment,
15 remote devices having output capability utilize circuitry identical or similar to the circuitry used for sensors, particularly for the communication and controller portions of the devices. Remote devices coupled to output devices typically are hard wired to power sources as they typically consume more power than the sensor input devices. For this reason, remote devices having output devices may not benefit as much from the power
20 saving features of the present invention.

A building monitoring and/or control system according to the present invention can have a large number of remote units which can be spread over an area covered by the RF communication. One system can have remotes located about 5,000 feet (of free

space) away from the master unit. The actual distance may be less due to intervening walls, floors and electromagnetic interference in general. Systems can have repeater units as well, units that receive and re-transmit messages to increase the area covered. In some systems, repeaters have a receiver coupled to a transmitter by a long, hard-wired link, allowing separate areas to be covered by one master unit.

Referring now to Figure 2, a remote unit 50 is illustrated in further detail, including antenna 23, a transceiver 52, and a controller 54. Transceiver 52 and controller 54 are each coupled to power source 56 in the embodiment illustrated. Controller 54 includes a programmable microprocessor such as the PIC microprocessor in one embodiment. In another embodiment, the controller is formed primarily of a once-programmable or writeable state machine. Transceiver 52 is preferably a UHF transceiver, for example transmitting and receiving in the 400 or 900 MHz range. Transceiver 52, in one embodiment, can be set to transmit and receive on different frequencies and to rapidly switch between frequencies. While transceiver 52 can include the capability to transmit and receive simultaneously, in a preferred embodiment, transceiver 52 can only either receive or transmit, but not both at the same time. In the embodiment illustrated, controller 54 is coupled to transceiver 52 with control input line 58, control output line 60, serial input line 62, and serial output line 64.

Control input line 58 can be used to reset the transceiver, to set modes, and to set transmit and receive frequencies. Control output line 60 can be used by signal controller 54 to determine when communication receptions or transmissions have been completed. Serial input line 62 can be used to feed messages to be transmitted to transceiver 52 as well as frequencies to be used and other control parameters. Serial output line 64 can be

used to provide messages received from transceiver 52 to controller 54 and can be used to convey information about signal strength to controller 54. The controller and serial lines can of course be used for any purpose and the uses discussed are only a few examples of such uses in one embodiment. In some embodiments, the serial lines are used to convey
5 both status and control data.

Remote unit 50 can also include sensor input lines 66 for coupling to security sensors and other devices. A reset line 68 can be coupled to a reset button to reset remote unit 50 when re-initialization of the unit is desired, such as at the time of installation or after battery changes. In some embodiments, battery power resumption serves as the
10 reset function. A power line 56 is illustrated supplying both transceiver 52 and controller 54. In some embodiments, power is supplied directly to only the controller portion or the transceiver portion, with the controller portion supplied from the transceiver portion or visa versa. In the embodiment illustrated, controller 54 and transceiver 52 are shown separately for purposes of illustrating the present invention. In one embodiment, both
15 controller 54 and transceiver 52 are included on the same chip, with a portion of the gates on board the chip dedicated for use as controller logic in general or used as a user programmable microprocessor in particular. In one embodiment, a PIC microprocessor is implemented on the same chip as the transceiver using CMOS logic and the PIC microprocessor is user programmable in an interpreted BASIC or JAVA language.

20 Referring now to Figure 3, master unit 22 is illustrated, including a transceiver portion 70 and a controller portion 72. Master unit 22 includes control lines 74 and 76 and serial lines 78 and 80. Reset line 82 is included in the embodiment illustrated as is a programmable input line 86, a panel LED output line 84, horn output line 32 and

telephone line 34. Programmable input line 86 can be used for many purposes, including down loading control logic, inputting keyboard strokes, and inputting lines of BASIC or JAVA code to be interpreted and executed. Panel LED line 84 can be used to control panel-mounted LEDs giving status information. Horn line 32 can be used to activate alarm horns or lights. Telephone line 34 can be used for automatic dial out purposes to report security breaches to a reporting service or to the police.

In one embodiment, master unit 22 and remote unit 50 share a common chip containing the transceiver and controller logic. In one embodiment, the transceiver and controller are both on board the same chip used in the remote units but the controller portion is supplanted, replaced, or augmented by additional programmable controller functionality such a personal computer. In many embodiments of the present invention, the master controller or controllers may require additional programmable functionality relative to the functionality required on the remote units.

In one embodiment of the present invention, the transceiver portion of the remote unit can operate in at least three modes. In one mode, the transceiver operates in a very low power "sleep" mode, wherein the transceiver is neither transmitting nor receiving. The transceiver can be awakened from the sleep mode by external control signals, such as provided by control lines coming from the control logic portion of the remote unit. In one embodiment of the invention, only the controller can change the state of the transceiver through the control lines such as control lines 58 and 60 in Figure 2. In a preferred embodiment, at least three events can awaken the transceiver from the sleep mode. One event is the occurrence of a sensor data change, such as a door switch opening, or a significant percentage change of an analog variable. Another event is the

lapse of a preset time interval, such as the lapse of the time interval between scheduled health status transmissions by the remote, or between scheduled health status polls by the master unit for which the remote desires to be awake. Yet another event is the resetting of the remote, such as resetting of reset line 68 in Figure 2.

5 In one embodiment, remote units can be configured or programmed to transmit sensor data only on a timeout occurrence or on a change occurrence. For example, a temperature sensor may be configured to transmit every half-hour or upon a one (1) degree change from the last transmission. This can greatly reduce power consumption.

10 In one embodiment, the controller portion of the remote unit can run in a low power mode, but is able to process external signals and interrupts. In one embodiment, timing is handled by timers on board the chip housing the transceiver and controller. In this embodiment, the controller logic is able to process timing functions while in a low power mode. In another embodiment, timing is handled by circuitry external to the microprocessor, with the microprocessor being able to respond to interrupts but not being
15 able to handle the timing functionality. In this embodiment, the timing can be handled by an RC timer or a crystal oscillator residing external to the microprocessor, allowing the microprocessor to lie in a very low power consumption mode while the external timing circuitry executes the timing functionality. In one embodiment, the timing and microprocessor circuitry both reside on the same chip, but can run in different power
20 consumption modes at the same time. In one embodiment, the remote, not including timing circuitry, initializes in a normal power consumption mode, sleeps in a very low power consumption mode, which, when interrupted, executes in a normal power consumption mode while transmitting or receiving.

Referring now to Figure 4, one method, process, or algorithm 150 according to the present invention is illustrated in a state transition diagram. Process 150 can be used for operating a remote unit such as remote unit 50 illustrated in Figure 2. Process 150 can start with an OFF state 100, where the remote unit is powered down, for example with a dead or removed battery. Upon application of power, such as installation of a battery, a POWER-UP event 101 can be sensed by the microprocessor or external circuitry, causing a transition to a WAITING FOR RESET state 102. A reset button is installed in many remote units for the purpose of allowing re-initialization of the remote unit by the person installing the unit. In one embodiment, reset can also be accomplished via software, which can be useful if the remote ever becomes confused or has not heard from the master unit for a long time period utilizing a watchdog timer. A RESET event 103 can cause a transition to an INITIALIZING state 104. While in INITIALIZING state 104, typical initialization steps can be executed, such as performing diagnostics, clearing memory, initializing counters and timers, and initializing variables. Upon completion of initialization, indicated at 105, transition to a GETTING SLOTS state 106 can occur. GETTING SLOTS state 106 is discussed in greater detail below, and can include receiving a time slot for communication with the master and receiving frequency slots for transmitting to, and receiving from, the master. In one embodiment, the frequencies to utilize in the next transmission and the time remaining to the next transmission are determined or obtained by the remote unit in the GETTING SLOTS state. Upon completion of the GETTING SLOTS state, indicated at 107, the process transitions to a SLEEPING state 108.

SLEEPING state 108 is preferably a very low power consumption state in which the transceiver is able to neither transmit nor receive. In SLEEPING state 108, the controller circuitry or microprocessor is preferably in a very low power consumption state as well. While in SLEEPING state 108, the remote unit should be able to be awakened by timer interrupts or device sensor interrupts. In a preferred embodiment, the remote unit stays in SLEEPING state 108 indefinitely until awakened by an interrupt. Upon reception of a SENSOR event 109, a transition to a TRANSMITTING ALARM state 110 can occur. During this transition or soon thereafter, the transceiver can be switched to a transmit mode. While in this state, an alarm transmission is performed, for example, on the transmission frequency determined in GETTING SLOT state 106. While in this state, transmission of other status or security information can also be performed. For example, the remote unit can transmit the length of time a contact has been open or the current battery voltage. Upon completion of transmission, indicated at 111, a WAITING FOR ACKNOWLEDGE state 112 can be entered. While in this state, the transceiver can be switched to a receive mode at a receive frequency determined during GETTING SLOT state 106. While in this state, the remote is typically in a higher power consumption state relative to SLEEPING state 108. Upon reception of an ACKNOWLEDGEMENT from the master unit, indicated at 113, the remote unit can enter SLEEPING state 108 again. If an acknowledge is not received within a TIMEOUT period, indicated at 151, the alarm can be transmitted again, in TRANSMITTING ALARM state 110. A number of re-transmissions can be attempted. The bi-directional nature of the remote units allows use of the acknowledgement function. The acknowledgement feature can remove the requirement of some current systems that the

remote unit broadcast alarms at high power, repeatedly, and for long time periods. Current systems typically do not have remote units that know when their reported alarm has been received, thus requiring repeated transmissions and high power transmissions, even when a low powered, single alarm transmission by the remote could have been or
5 had, in fact, been received.

SLEEPING state 108 can also be exited upon reception of a TIMEOUT event
115. In one embodiment, a timer is loaded with a time period determined during
GETTING SLOT state 106. In one embodiment, a time to wait until transmitting status
information, such as 300 seconds, is received from the master unit during GETTING
10 SLOT state 106. The time to wait can either be used directly or adjusted with a margin of
error to insure that the remote unit is not sleeping when the time period has elapsed. For
example, a 360 second time to wait can be used in conjunction with a 5 second margin or
error to awaken the remote unit for a receiving period from 355 seconds to 365 seconds.
After reception of a TIMEOUT event 115, a status communicating step 114 can be
15 executed, which can include setting the transceiver to either a transmit or a receive mode,
discussed below.

In one embodiment, a WAITING FOR POLL state 116 can be entered, and the
transceiver is set to a receive state at a receive frequency. In this embodiment, the remote
does not transmit health status until polled by the master unit. The remote can remain in
20 WAITING FOR POLL state 116 until time elapses, whereupon the remote unit can return
to SLEEPING state 108 until the occurrence of the next time period has lapsed.
Alternatively, during the WAITING FOR POLL state 116, the master may transmit a
wait instruction that simply indicates that the remote should return to the SLEEPING

state 108 for a predetermined period of time. This type of instruction can be used, for example, when the data provided by a particular sensor is no longer needed or is less important in the current system mode. It is contemplated that the system mode can be changed on the fly, whereby the particular sensor may again be polled more often.

5 In one method, a POLL REQUEST 117 is received from the master unit and the remote unit transitions to a TRANSMITTING HEALTH state 118. While in the TRANSMITTING HEALTH state 118 or soon before, the remote unit transceiver can be put into a transmit state at the desired frequency. In one embodiment, the poll request includes the desired transmit frequency to use.

10 The health status and sensor data and sensor type of the remote unit can be transmitted. In one embodiment, a simple signal can be transmitted containing little information. In another embodiment, more information is included in the transmission. Information that can be transmitted includes remote unit ID, battery voltage, received master unit signal strength, and internal time.

15 In some embodiments, sensor data is included in the TRANSMITTING HEALTH transmission. For example, in a room temperature sensor, the temperature can be transmitted as part of the health or status message. In this way, the periodic message used to insure that the remote unit is still functioning can also be used to log the current data from the sensors. In some embodiments, the data is too energy intensive to obtain
20 and only remote unit health information is transmitted. After completion of the TRANSMITTING HEALTH state 118, indicated at 119, a WAITING FOR ACK state 120 can be executed. A WAITING FOR ACK state is executed in some embodiments to await an acknowledgement and/or a synch signal. A synch signal can be used to reset an

internal timer to be used in determining the next time to awake from SLEEPING state 108. A synch signal can be used to prevent small remote unit timer inaccuracies from accumulating into large inaccuracies over time and allowing the remote unit timing to drift from the master unit timing. In some embodiments, an acknowledge signal received from the master unit is used to reset the time interval used by timeout event 109. In some embodiments, the acknowledge signal includes a new time and/or frequencies to be used by the remote unit for the next SLEEPING state and transmission and receiving states. In this way, the master unit can maintain close control over the next health transmission time and the next receiving and transmitting frequencies. After reception of the ACK or synch signal indicated at 121, a CALCULATING NEW TIME state 122 can be executed, for determining a new time to be used to determine the timing of event 115.

In one method according to the present invention, after expiration of a timer, a TIMEOUT event 155 occurs which can lead to execution of TRANSMITTING HEALTH state 118 rather than WAITING FOR POLL state 116. After occurrence of event 155, the remote unit can immediately transmit health data. In some embodiments, new transmission times, transmission frequencies, and flags indicating whether to wait for master unit polling are included in acknowledge or synch messages transmitted from master to remote.

Execution of TRANSMITTING HEALTH state 118 and subsequent state are as previously described. In one embodiment, the decision of whether to generate TIMEOUT event 115 or 155 can be made in the remote, in response to a message received from the master. The process utilizing event 155 is preferred. The process

utilizing event 115 is illustrated as an alternative embodiment suitable for some applications.

Remote units utilizing the present invention can thus remain asleep in a very lower power consumption mode, neither receiving nor transmitting. One aspect of the present invention making this possible is the coordination of timing between master and remotes. Specifically, when the remote awakes and is able to receive over a window of time, the master should know the start time and time width of that time window to be able to transmit within that window if such a transmission is desirable. Specifically, when the master has allocated a time slot or window for receiving the health of a particular remote unit, that particular unit should transmit its health within that time window in order to be heard.

Coordination between master and remotes can include coordination of what frequencies to use, whether a transmission has been received, what time interval to transmit health data in, and when to begin transmitting the health data. This coordination is preferably obtained with communication between master and remote units. In particular, communication from master to remote can establish which frequencies to use, when to transmit health data, and whether the last transmission of a remote was received by the master. The fact that this data can be received by the remote means that the remote can react by changing to a different transmitting frequency, changing to a different transmitting power, changing to a different effective time interval or time interval start, and can re-transmit in the absence of an acknowledgment from the master unit. With the time windows for periodic transmission of health data established between remote and master, the remote can sleep in a very low power mode for a high percentage

of the time, changing to a higher power mode only to transmit sensor changes and to periodically transmit health or sensor data.

In one embodiment, only the master unit is aware of the overall timing or scheduling scheme of the system, with the remotes being aware only of the time until the
5 start of the next scheduled remote unit TRANSMITTING HEALTH state or the time until the start of the next remote unit WAITING FOR POLL period. In this embodiment, the amount of processing power required in the remote is held down while only the master is aware of the overall scheduling of time slots.

Adding receivers to the remote units allows adjustment of frequencies in response
10 to communication difficulties. In a typical building installation, remote units are installed near doors and windows and a master unit is installed, often in a central location. Over time, especially in a commercial building, furniture, walls, doors, and dividers are added, which can attenuate RF radiation transmitted through the building, between remote and master units. Reflections can also occur, causing Raleigh cancellation at certain
15 frequencies, greatly reducing the effectiveness of communication at certain frequencies at certain locations, such as in corners. Using bi-directional communication between master and remote units allows adaptive selection of frequencies over time without requiring any work in the field with either master or remote units.

Referring now to Figure 5, another aspect of the invention is illustrated in an arm-
20 disarm process 200. The process can begin in a RECEIVING state 202. Any receiving state should be suitable to serve as receiving state 202. In one embodiment, a receiving state immediately after a periodic health status transmission is used as a receiving state. In one embodiment, a receiving state immediately after a sensor change transmission is

used as a receiving state. In another embodiment, a periodic WAITING FOR POLL state is used as a receiving state. Upon receiving an ARM message 203, an ARMING state 204 is entered during which the security device can be armed. "Arming" a security device can refer to various processes for various devices. In general, arming a device refers to making some aspect of the device active, and often refers to making a device active where the active device consumes more power than the inactive device. Referring again to Figure 5, when a DISARM message 207 is received by the remote unit, a DISARMING state 208 is entered and the device disarmed. When disarming processing is done, indicated at 209, RECEIVING state 202 can be returned to.

One reason for disarming a device is to conserve power in a remote battery powered device. Some devices, such as continuity switches may use only a small amount of power when active. Other devices, such as infrared motion detectors may use a larger amount of power when active. In either case, some power can be conserved by disarming the device to an inactive state. When a building or house is occupied, it may be desirable to disarm many if not all of the security devices.

One reason for disarming a device is to reduce the number of alarm event transmissions made by the device. This can reduce RF traffic and also conserve battery life, as power is not used for transmitting messages as often. In one example, door switches are disarmed during the day on doors that are to be in use, and are armed during the evening, when the building is closed and secured. In another example, some higher power devices are armed only when verification is required. For example, a remote microphone device may be armed only when listening to follow up on a motion detector

alarm or a door open alarm, or a temperature measuring device may only be armed when a temperature reading is desired, and disarmed the remainder of the time.

Referring now to Figure 6, an alarm confirmation aspect of the invention is illustrated in a conformation process 230. Process 230 can be used when reconfirmation
5 of a previous message or event is desired. While in a receiving state 232, reception of a CONFIRMATION or RE-READ message 233 can cause a transition to a READING SENSOR or RE-READING SENSOR state 234 in which a sensor is read or polled to determine its value. Upon completion of reading the sensor, indicated at 235, a TRANSMITTING DATA state 236 can be executed in which the desired data is
10 transmitted to the master unit. Upon completion of transmission, indicated at 237, a RECEIVING state can be entered again. In preferred embodiments, completion of transmission requires reception of an acknowledgement message from the master controller.

Confirmation or re-read requests as illustrated in Figure 6 can serve to greatly
15 reduce the number of false alarms issued by a security system. In one example, when an alarm event is received by the master unit, the type of sensor is looked up by the master unit, or in some embodiments, is included in the message transmitted by the remote device. In the master unit, a lookup table is used in one embodiment to determine whether confirmation should be requested, how soon, and for what number of repetitions.
20 In one example of the invention, a message is received from a remote unit indicating the opening of a window. The lookup table for that type of device indicates that two readings are required and that the second reading should be taken in 0.5 seconds. The acknowledgment message to the remote includes a reconfirmation request. The remote

unit reads the window sensor again after 0.5 seconds and transmits the value to the master unit. The master unit can then report out that the window opened if both readings agree. In the case of a motion detector, a set number of readings over a set time period may be required to report motion to a central reporting service.

5 In some embodiments, a local alarm is sounded for a grace period to allow an occupant to reset the alarm panel before sending an alarm to a central location. In some embodiments, each type of security sensor type is given a weight and a total weight threshold must be crossed before an alarm is reported. For example, a motion detector and either a door opening or a window opening is required to report an intrusion, or at
10 least two different motion detectors must be tripped before an alarm is reported to a central agency. In another example, each alarm event can be given a weight and the system as a whole can have weight decayed or removed over time. In one example, each motion detecting event is given 1 point and each door opening event given 5 points, with the system removing 1 point per 60 seconds, with 6 points required to report out an
15 alarm. The intelligence can be programmed or configured into a master unit, and changed from time to time, without requiring physically or locally changing the programming of the remote units. The system, master unit, and remote unit programming or configuring can be varied from application to application as well. This can be a function of the level of security desired and the relative costs of false alarms to the user.

20 Having thus described the preferred embodiments of the present invention, those of skill in the art will readily appreciate that the teachings found herein may be applied to yet other embodiments within the scope of the claims hereto attached.

WHAT IS CLAIMED IS:

1. A building monitoring system utilizing bi-directional radio frequency communication comprising:

at least one master unit including a radio frequency transmitter and receiver; and
a plurality of remote units having a radio frequency transmitter and receiver, said remote units capable of transmitting to and receiving from said master unit.

2. A building monitoring system according to claim 1, wherein at least some of said remote units include sensors logically coupled to said remote units.

3. A building monitoring system according to claim 1, wherein said remote units having a first low power consumption state in which said remote units can neither receive nor transmit, a second power consumption state in which said units can receive, and a third power consumption state in which said units can transmit, wherein said second and third states have higher power consumption than said first state.

4. A building monitoring system according to claim 3, wherein said remote units are in said receive state only at predetermined intervals.

5. A building monitoring system as recited in claim 4, wherein in normal operation said remote units are in said receive state only after being in said transmit state.

6. A building monitoring system as recited in claim 5, wherein said remote

units are in said receive state and await an acknowledgment from said master unit only after being in said transmit state.

7. A building monitoring system as recited in claim 4, wherein said remote units transmit messages at periodic intervals.

8. A building monitoring system as recited in claim 4, wherein said remote units transmit messages after a predetermined event for a discrete period of time and then await an acknowledgment of said message transmission.

9. A building monitoring system as recited in claim 8, wherein after said remote units receive said acknowledgment, said remote units do not further transmit said transmitted message.

10. A building monitoring system as recited in claim 2, wherein said remote units have an armed state in which said sensors are active and able to measure sensor variables, and a disarmed state in which said remote units are unable to transmit messages, wherein said remote units have means for switching between said armed and disarmed states, and wherein said means for switching between the armed and disarmed states is responsive to a message received from said master unit.

11. A building monitoring system as recited in claim 10, wherein said remote units are unable to measure at least some sensor variables while in said disarmed state.

12. A building monitoring system as recited in claim 10, wherein said remote unit includes a controller logically coupled to said receiver, wherein said means for switching between said armed and disarmed states passes said message from said receiver to said controller; processes said message in said controller; executes arm instructions in response to an arm message; and executes disarm instructions in response to a disarm message, wherein said disarm instructions prevent said sensor change messages from being transmitted.

13. A building monitoring system as recited in claim 2, wherein said remote units have a reading sensor state in which said sensors are read by said coupled remote units, wherein said reading sensor state is entered in response to a read message received from said master unit; and

said system including means for validating a sensor event, said means for validating including means for requesting reading of said sensor initiated by said master unit and means for reading said sensor by said remote unit responsive to said means for requesting, wherein said means for validating includes means for transmitting sensor data from said remote unit to said master unit.

14. A building monitoring system as recited in claim 13, wherein said sensors have a type and, said means for validating sensor data includes at least two different validation processes, wherein said means for validating include means for identifying a sensor type and means responsive to said type for determining which of said validation processes to use.

15. A building monitoring system as recited in claim 14, wherein said validation processes waits a predetermined time before requesting an additional sensor reading and said predetermined time to wait is a function of said remote sensor type.

16. A building monitoring system as recited in claim 14, wherein said means for validating includes an indication of whether to request an additional sensor reading and said indication of whether to request said additional reading is a function of said remote sensor type.

17. A building monitoring system utilizing bi-directional radio frequency communication comprising:

at least one master unit including a radio frequency transmitter and receiver;

a plurality of remote units each having a radio frequency transmitter and receiver, said remote units capable of transmitting to and receiving from said master unit and capable of generating polling events in response to a poll message received from said master unit;

said remote units each having at least one timer for generating a timeout event;

said remote units each having at least one sensor for measuring selected variables;

said remote units capable of generating a sensor event in response to a sensor change of measurement; and

said remote units each having a non-communicating state with low power consumption and in which said remote units can neither receive nor transmit, and a receiving state having higher power consumption than said non-communicating state and

in which said units can receive, wherein said selected remote units are in said receiving state only after selected event occurrences, wherein said selected events are selected from the group consisting of timeout events, polling events, and sensor events.

18. A building monitoring system as recited in claim 17, wherein said remote units each have a transmitting state in which said remote unit can transmit and in which power consumption is higher than in said non-communicating state, wherein said polling event causes said remote unit to enter said transmitting state followed by entering said receiving state.

19. A building monitoring system as recited in claim 17, wherein said remote units each have a transmitting state in which said remote unit can transmit and in which power consumption is higher than in said non-communicating state, wherein said sensor event causes said remote unit to enter said transmitting state followed by entering said receiving state.

20. A building monitoring system as recited in claim 19, wherein said sensor event is caused by a change in a measured variable.

21. A building monitoring system as recited in claim 20, wherein said sensor variable is a binary variable.

22. A building monitoring system as recited in claim 20, wherein said sensor

variable is a continuous variable.

23. A method for communicating between a remote unit and a master unit in a radio-frequency building monitoring system, comprising:

transmitting a message from the remote unit to the master unit; and

transmitting an acknowledge from the master unit to the remote unit indicating receipt of the message.

24. A method according to claim 23, further comprising the steps of:

transmitting a message from the master unit to the remote unit; and

transmitting an acknowledge from the remote unit to the master unit indicating receipt of the message.

25. A method for communicating between a remote unit and a master unit in a radio-frequency building monitoring system, wherein the remote unit is capable of transmitting to and receiving messages from the master unit, the remote unit further having a non-communicating low power consumption state in which said remote unit can neither receive nor transmit, a receiving state in which said remote unit can receive, and a transmitting state in which said remote unit can transmit, said remote unit also having at least one sensor for producing a sensor change event, the method comprising:

waiting for the sensor change event while in said non-communicating state;

entering the transmitting state and transmitting a message upon detecting the sensor change event;

entering the receiving state and waiting for acknowledgment of said data transmission; and

returning to the waiting for sensor change step.

26. A method as recited in claim 25, wherein said remote unit does not transmit while in said receiving state and does not receive while in said transmitting state.

27. A method as recited in claim 25, wherein said remote unit receives scheduling information from said master unit while in at least some of said receiving states.

28. A method as recited in claim 25, wherein said remote unit receives transmission frequency instructions from said master while in at least some of said receiving states.

29. A method as recited in claim 25, wherein said system includes a validating step, when said validating step includes: receiving a request for a sensor re-read from said master unit, wherein said sensor re-read request is responded to by said remote unit by reading said sensor and transmitting a message to said master unit.

30. A method as recited in claim 25, further including:
changing to a disarmed state upon reception of a disarm message from said master unit, wherein, while in said disarmed state, said remote unit does not, in combination,

both sense sensor data from the sensor and transmit sensor data; and

changing to an armed state upon reception of an arm message from said master unit, wherein, while in said armed state, said remote unit does, in combination, sense sensor data from the sensor and transmit sensor data.

31. A method for communicating between a remote unit and a master unit in a radio-frequency building monitoring system, wherein the remote unit is capable of transmitting to and receiving messages from the master unit, the remote unit further having a non-communicating low power consumption state in which said remote unit can neither receive nor transmit, a receiving state in which said remote unit can receive, and a transmitting state in which said remote unit can transmit, the method comprising:

determining a time for communicating with said master;

waiting for said time while in said non-communicating state;

changing to said transmitting state and transmitting a message upon attaining said determined time for communication;

waiting for acknowledgment of said transmission in said receiving state; and

returning to said determining step for determining a new time for communicating with said master.

32. A method according to claim 31, wherein the remote unit has at least one sensor for producing sensor output data, at least some of the messages transmitted upon attaining said time for communication including said sensor output data.

33. A method for communicating between a remote unit and a master unit in a radio-frequency building monitoring system, wherein the remote unit is capable of transmitting to and receiving messages from the master unit, the remote unit further having a non-communicating low power consumption state in which said remote unit can neither receive nor transmit, a receiving state in which said remote unit can receive, and a transmitting state in which said remote unit can transmit, the method comprising:

providing a time signal from said master to said remote;

waiting while in said non-communicating state for a time interval corresponding to said provided time signal; and

changing to said transmitting state and transmitting a message after expiration of said time interval.

34. A method according to claim 32, further comprising:

waiting for acknowledgment of said transmission in said receiving state; and

waiting while in said non-communicating state.

ABSTRACT OF THE DISCLOSURE

Building monitoring and control systems including bi-directional radio frequency links between master and remote units wherein the remote units operate in a low power, non-receiving state a majority of the time is disclosed. The bi-directional capability
5 allows coordinated scheduling which aids in allowing the remote units to transmit data only at periodic time intervals to extend battery life. The bi-directional capabilities also allow for re-read requests for alarm validation and for putting remote units in armed and disarmed states for power conservation.

CERTIFICATE UNDER 37 CFR 110: The undersigned hereby certifies that this paper or papers, as described hereinabove, are being deposited in the United States Postal Service, "Express Mail Post Office to Addressee" having an Express Mail Mailing label number of:


EL085667194US

in an envelope addressed to:
Assistant Commissioner for Patents
Washington, DC 20231

on this 13th day of May 1999
Crompton, Seager & Tufte, LLC

By: 

Fig. 1

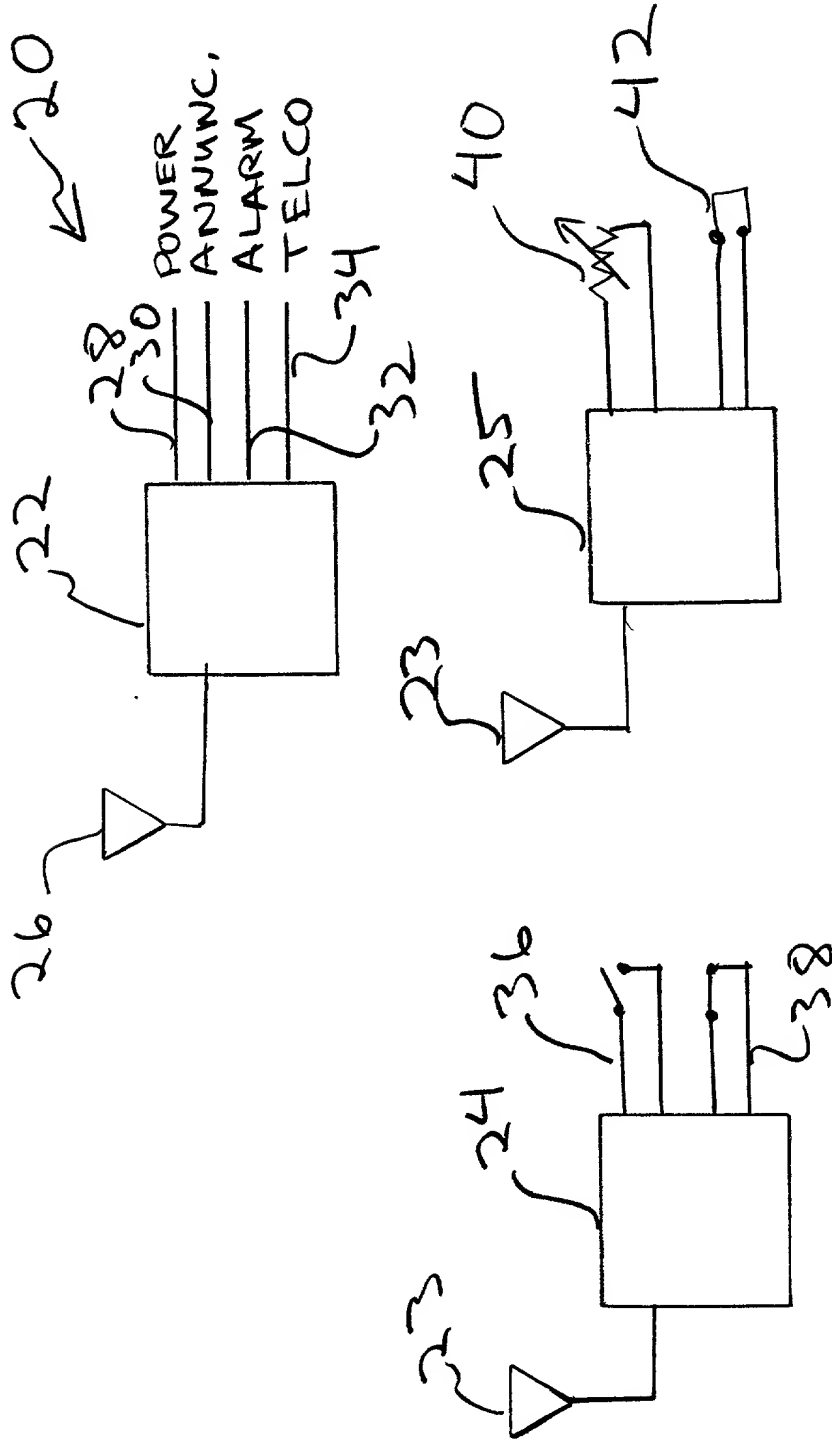

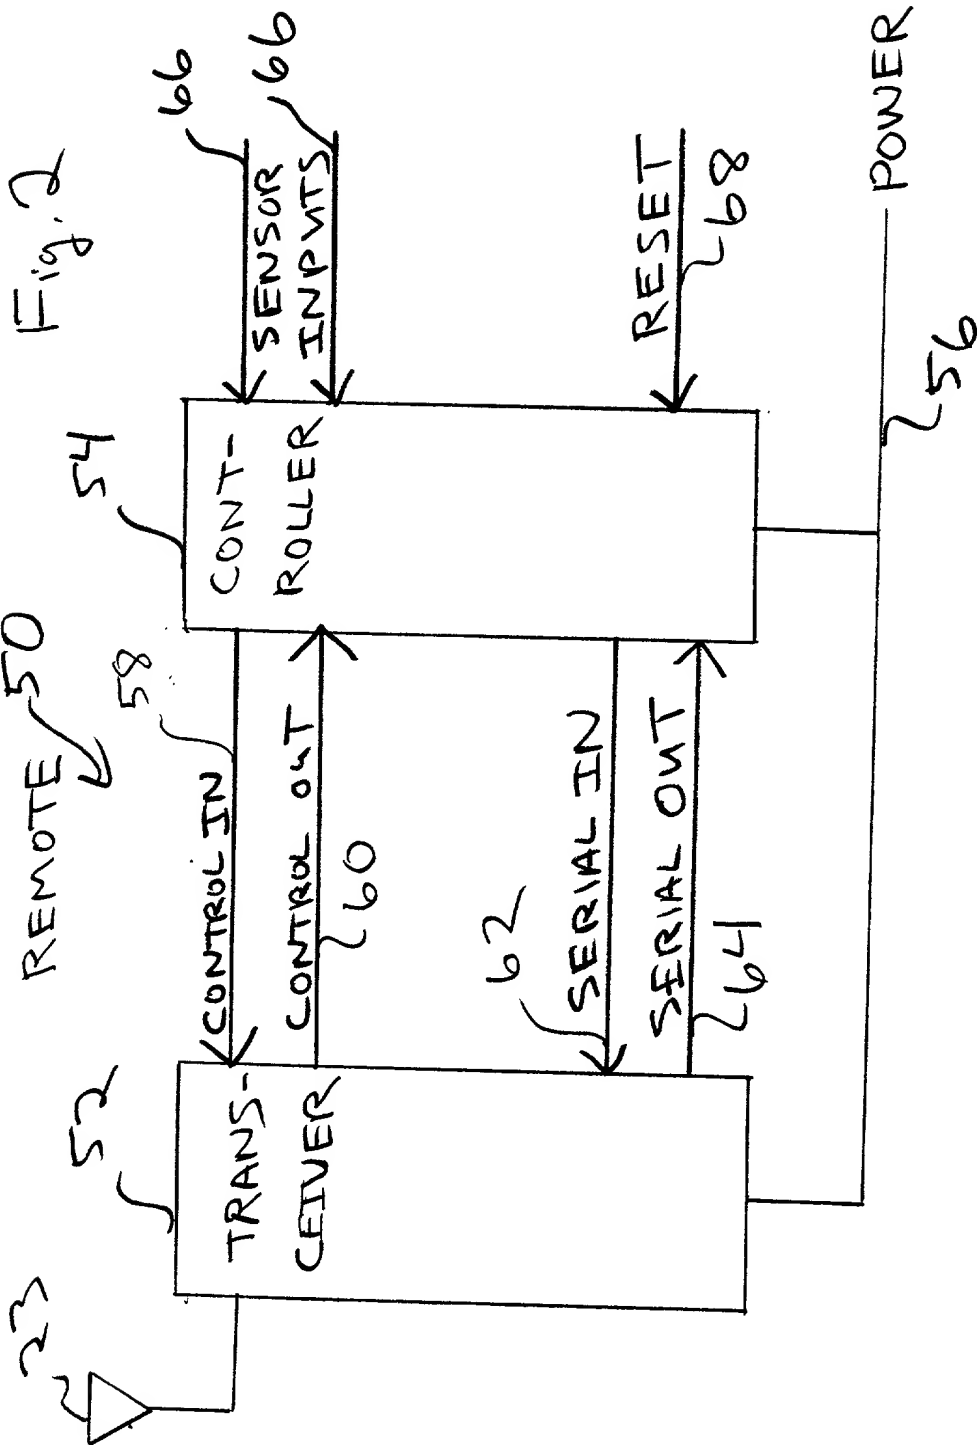


Fig. 3

66T90260T660
MASTER

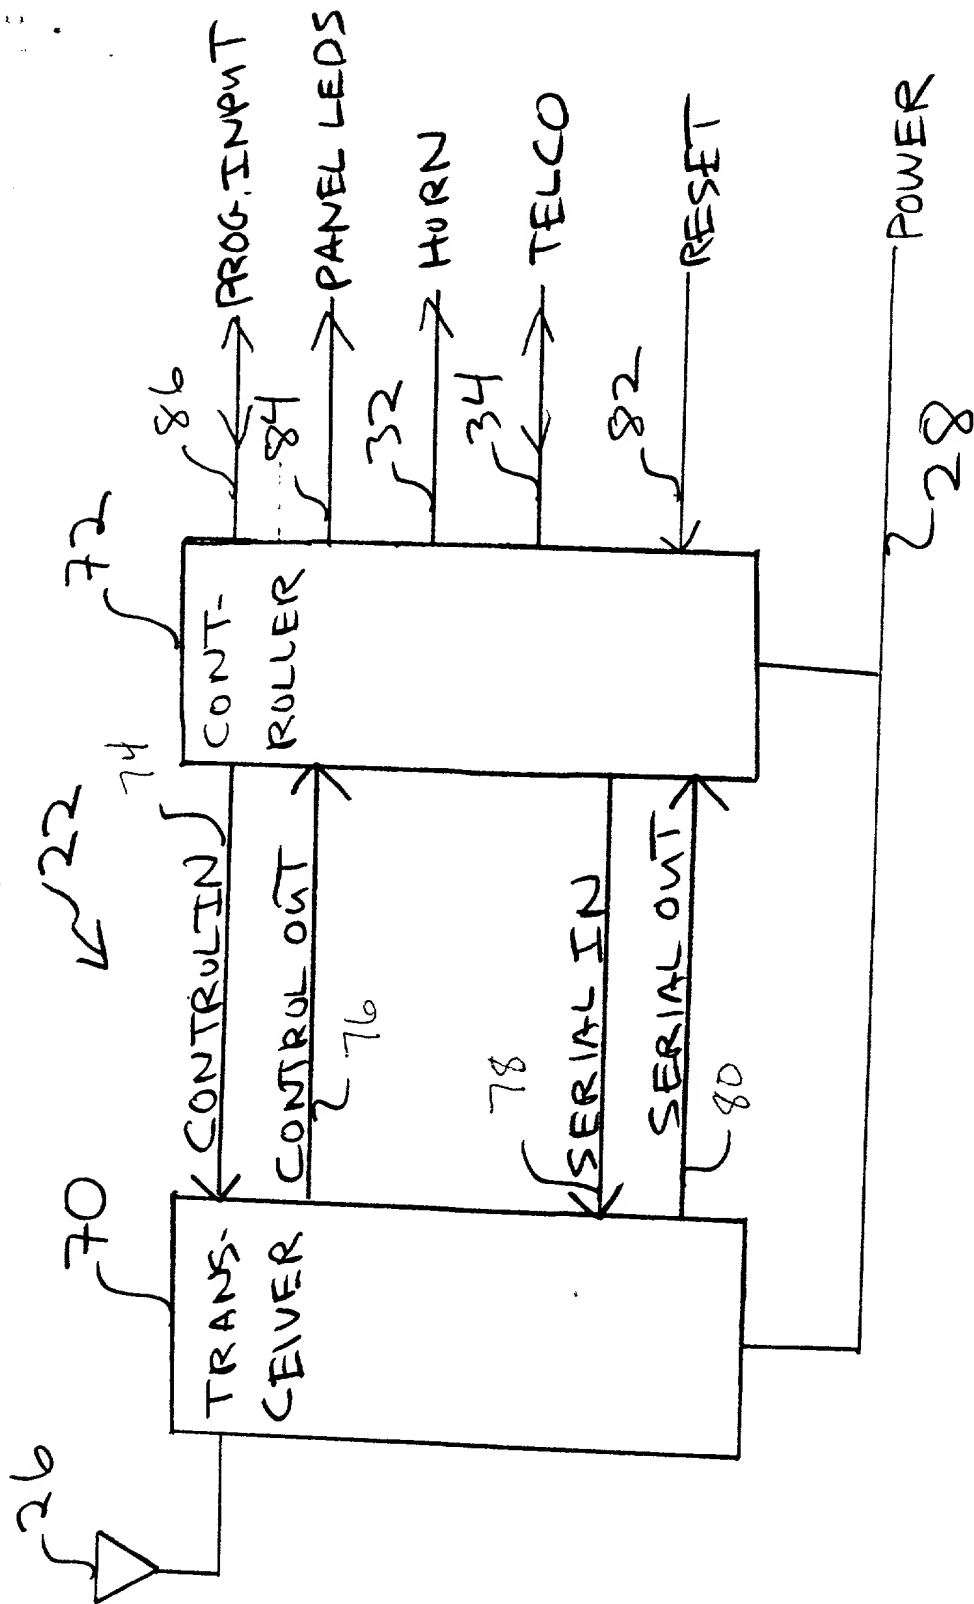


Fig. 4

150

666T50-260T560

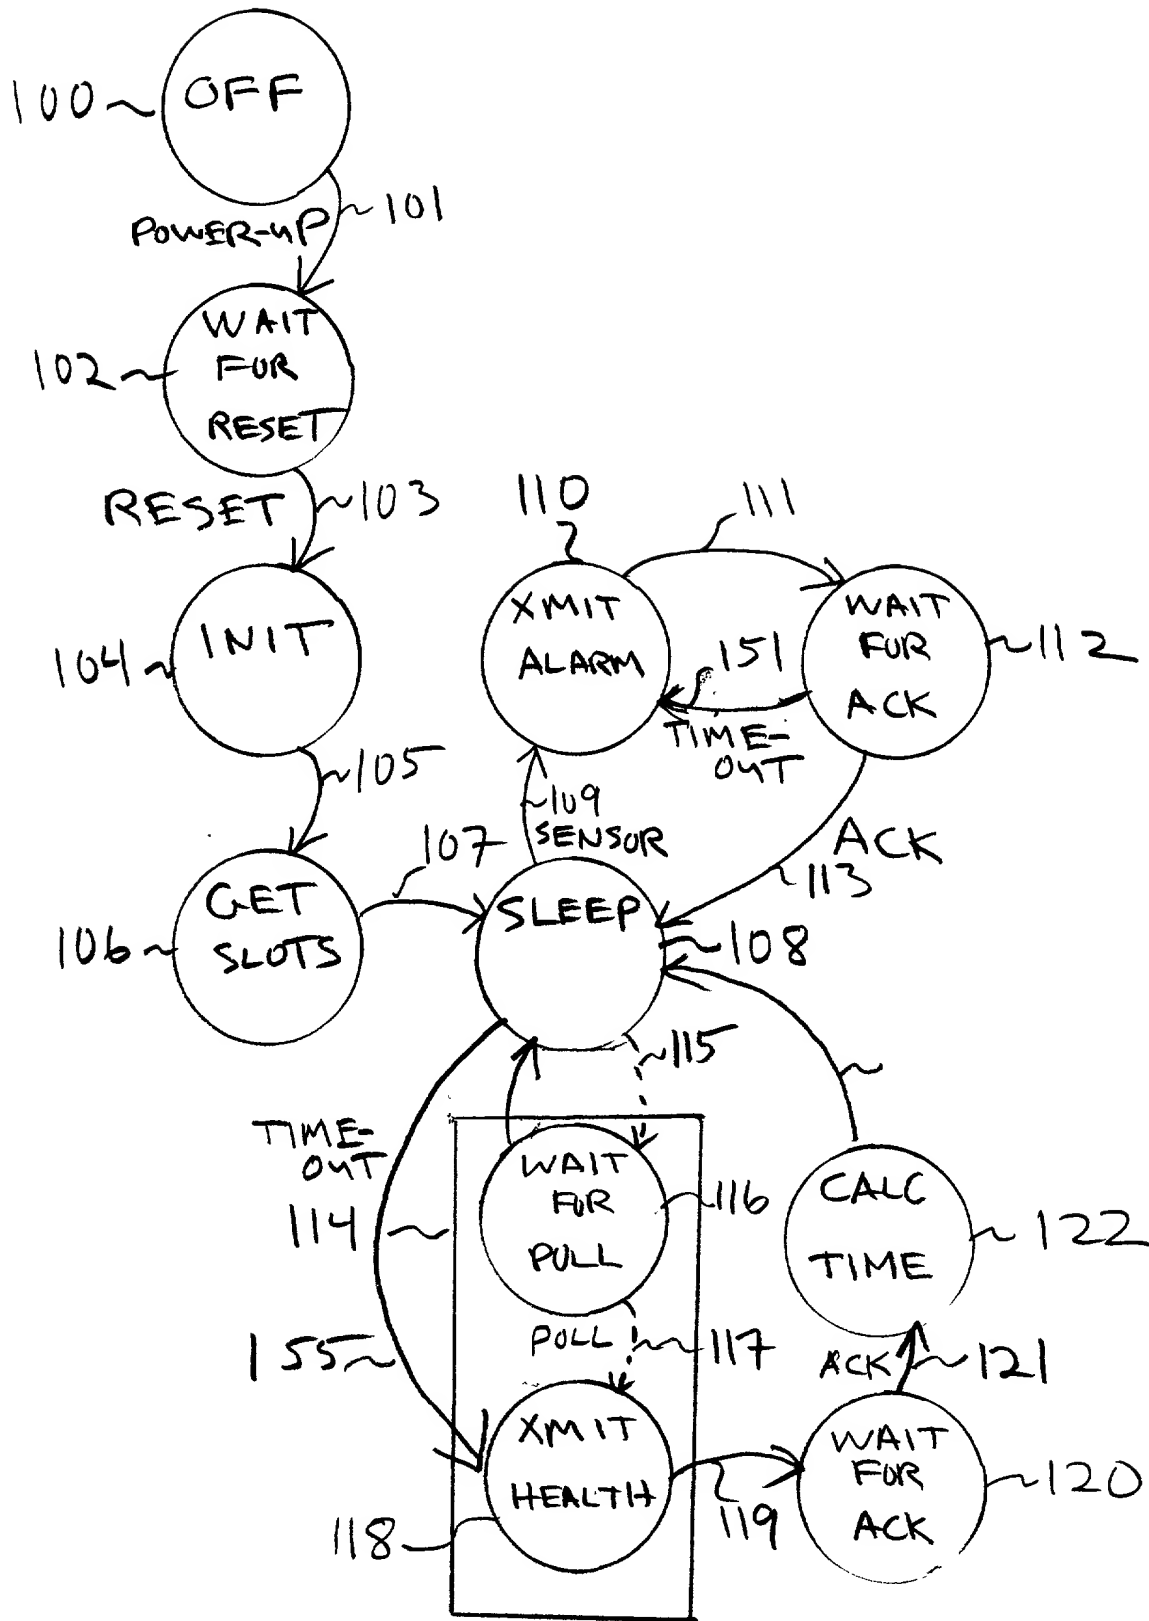


Fig. 5


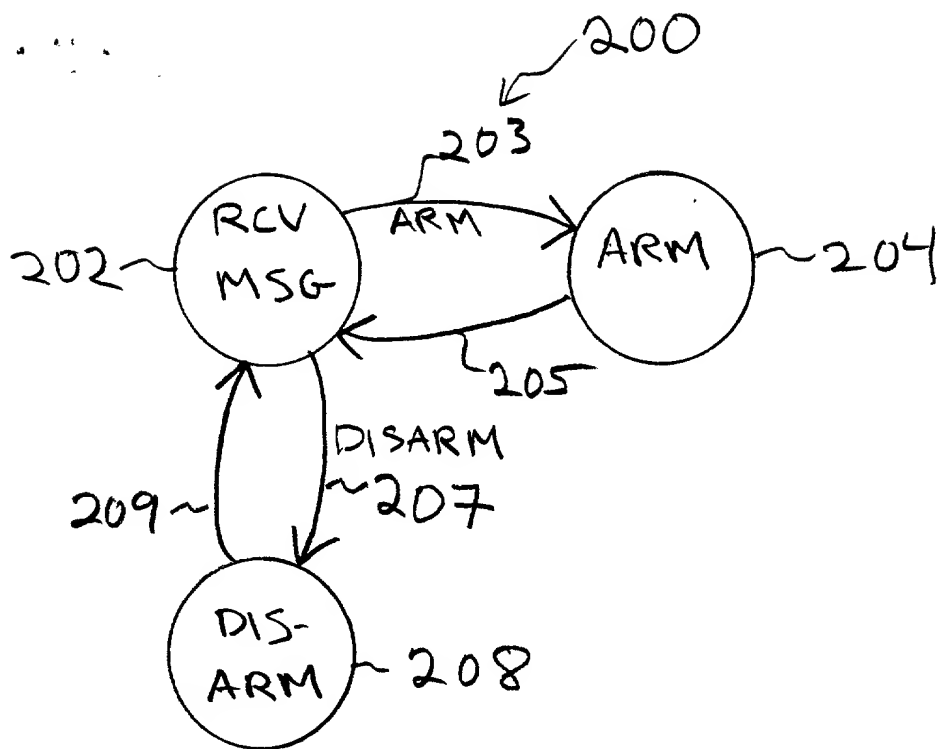


Fig. 6

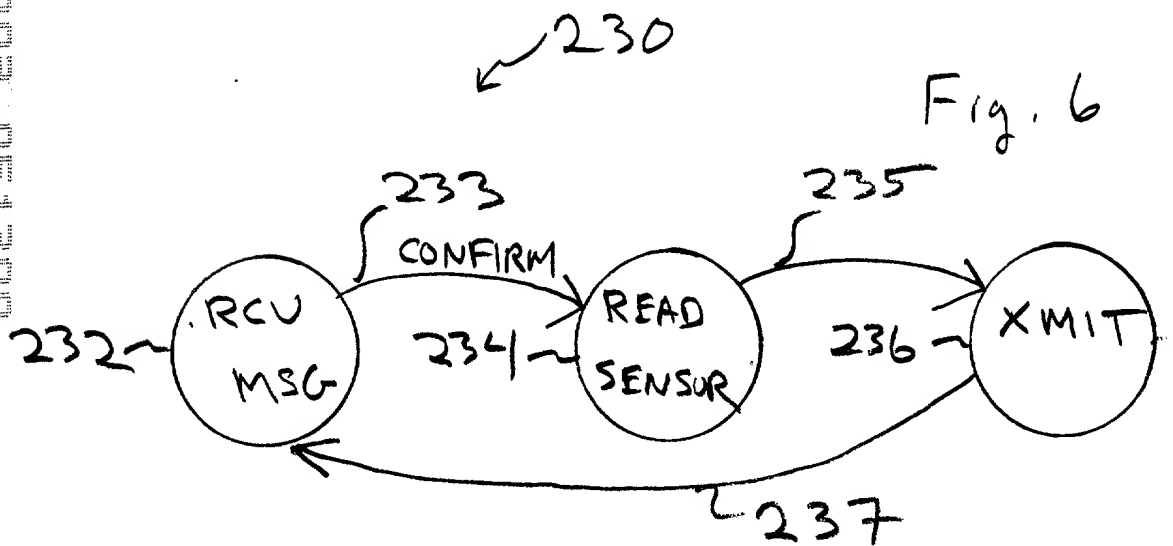

666T60:260TFE60

As a below named inventor, I hereby declare that:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

STATE VALIDATION USING BI-DIRECTIONAL WIRELESS LINK

(check one) X is attached hereto
_____ was filed on _____ as
Application Serial No. _____
and was amended on _____.

(if applicable)

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).*

Prior Foreign Application(s)			Priority Claimed	
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
--------------------------	---------------	---

Address all correspondence to JOHN G. SHUDY, JR., Honeywell Inc., Honeywell Plaza, P.O. Box 524, Office of General Counsel, MN12-8251, Minneapolis, Minnesota 55440-0524.

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

(1) prior art cited in search reports of a foreign patent office in a counterpart application, and

(2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

(1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or

(2) It refutes, or is inconsistent with, a position the applicant takes in:

(i) Opposing an argument of unpatentability relied on by the Office, or

(ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

(1) Each inventor named in the application;

(2) Each attorney or agent who prepares or prosecutes the application; and

(3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.